



MANROSE®

FULLY ADJUSTABLE FAN RUN-ON TIMER

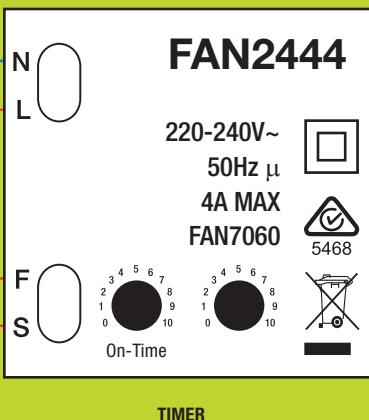

- Run-on timer adjustable 0 sec to 20 mins
- Delay start adjustable 0 sec to 5 mins
- Easy to install. Designed to fit in a wall mounted flush box or alternatively, within the fan-light assembly
- Suitable for bathroom, toilet & laundry applications

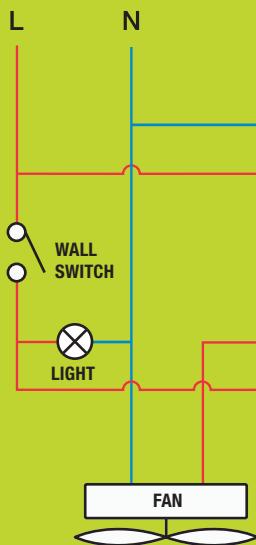

The **Delay Start** and **Run-On** timer features provide full control of the fan's running time, to help ensure all stale air is cleared from the room.

FAN2444

2 YEAR
WARRANTY

Important

All installations must comply with the current electrical and building regulations required by your local authority, and must be carried out by a registered electrician.

Settings

Select the desired fan **START DELAY** time you want by using the **Off-Time** potentiometer.

Select the desired fan **RUN-ON** time you want by using the **On-Time** potentiometer.

Ensure the wall switch is open for 5 seconds after power is applied.

| Potentiometer Value | On-Time (Run-on) | Off-Time (Delay Start) |
|---------------------|------------------|------------------------|
| 0 | 0 secs | 0 secs |
| 1 | 2 mins | 30 secs |
| 2 | 4 mins | 1 min |
| 3 | 6 mins | 1.5 mins |
| 4 | 8 mins | 2 mins |
| 5 | 10 mins | 2.5 mins |
| 6 | 12 mins | 3 mins |
| 7 | 14 mins | 3.5 mins |
| 8 | 16 mins | 4 mins |
| 9 | 18 mins | 4.5 mins |
| 10 | 20 mins | 5 mins |

Tips

When the fan is powered on, an LED between the dials will flash according to the setting of the On-Time knob, then the Off-Time knob: An initial 1 second long flash will be followed by a number of short 1/4 second flashes corresponding to the dial values.

The timer is in test mode for the first 5 minutes after being powered on. In test mode, the LED will light up then flash according to the setting of the knob when changed.

WARNING: Treat the product as live and dangerous when power is connected. Only connect power to the product when it has been safely sealed away inside a flush box or terminal box.

Regulatory Part Number: FAN7060