

Technical Data Sheet

WEISS™

FH706LED


ClearGlow 3 in 1

White Fascia

Dimensions

Cut-out size for outlet vent 155mm

Cut-out size for main body 161mmx364mm

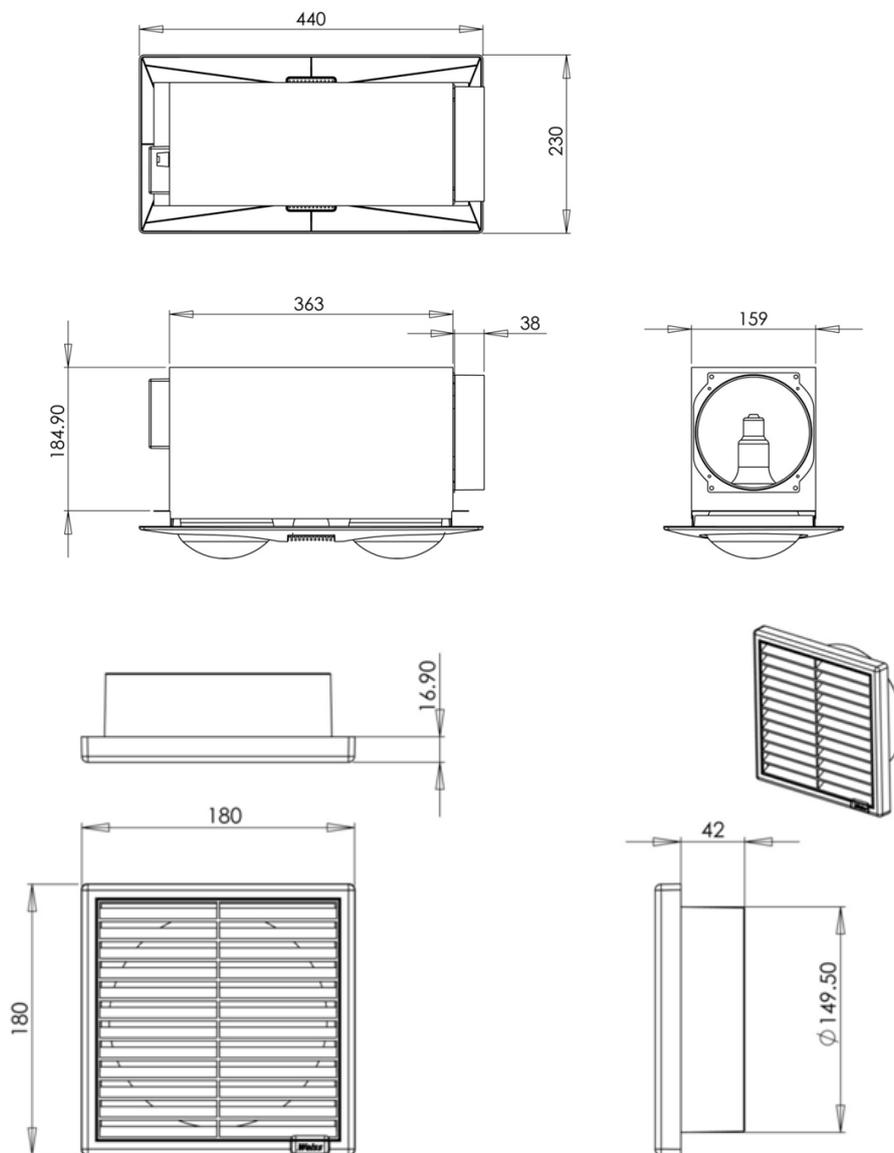

Specifications

Weight	4.6 Kg
Colour of front fascia	White
Housing material	Sheet Steel
Fascia material	Polycarbonate

Approval

Features

- Easy to install
- Powerful fan motor due to blade pitch design
- 3 meters of 150mm diameter ducting included
- Rugged steel body
- 2 x 275 watt heat globes
- 1 x 5 watt LED lamp
- 3 way wall switch
- All parts are included
- 3 year extended warranty

Technical Data Sheet

Product Use

The FH706 is used for lighting and extraction of mist

Typical applications:

- Bathrooms

Environmental Conditions

Operation	to IEC 721-3-3
Climatic conditions	class 3K5
Temperature	0...+50°C
Humidity	<95% r.h.

Standards

Test standards	AS/NZS 603350.2.80: 2004 Amdts 1 and 1:2011 Amdt.1 5772
Test Report no EMC Compliance	This is a Level One product with an C frame motor that has a very low risk of causing EMC Interference

General

Fan with ducting extracts mist that can cause mould and dampness and expels it outside your home

Free air fan performance	286 ³ /hr 79.4L/sec
Installed Decibel rating	46 DB
Ceiling Insulation clearance	150mm from steel body on all sides, no insulation to cover body

Ordering

When ordering please give name and type,	
Reference	FH706
Barcode	942000490202-4

Technical Data

Power Supply	230 VAC
Power consumption	max. 3 Amps
Supply Line fusing	max. 10A
Connection terminals	screw clamp terminals
For solid wires	2 x 1.5mm ²
Motor	230-240VAC 50Hz 0,3Amp
Motor insulation class	B1
Total motor wattage	25Watts
Motor protection	Thermally protected